


## 4 mm ULTRA Sinusscopes


A Powerful Solution for Sinus Surgery

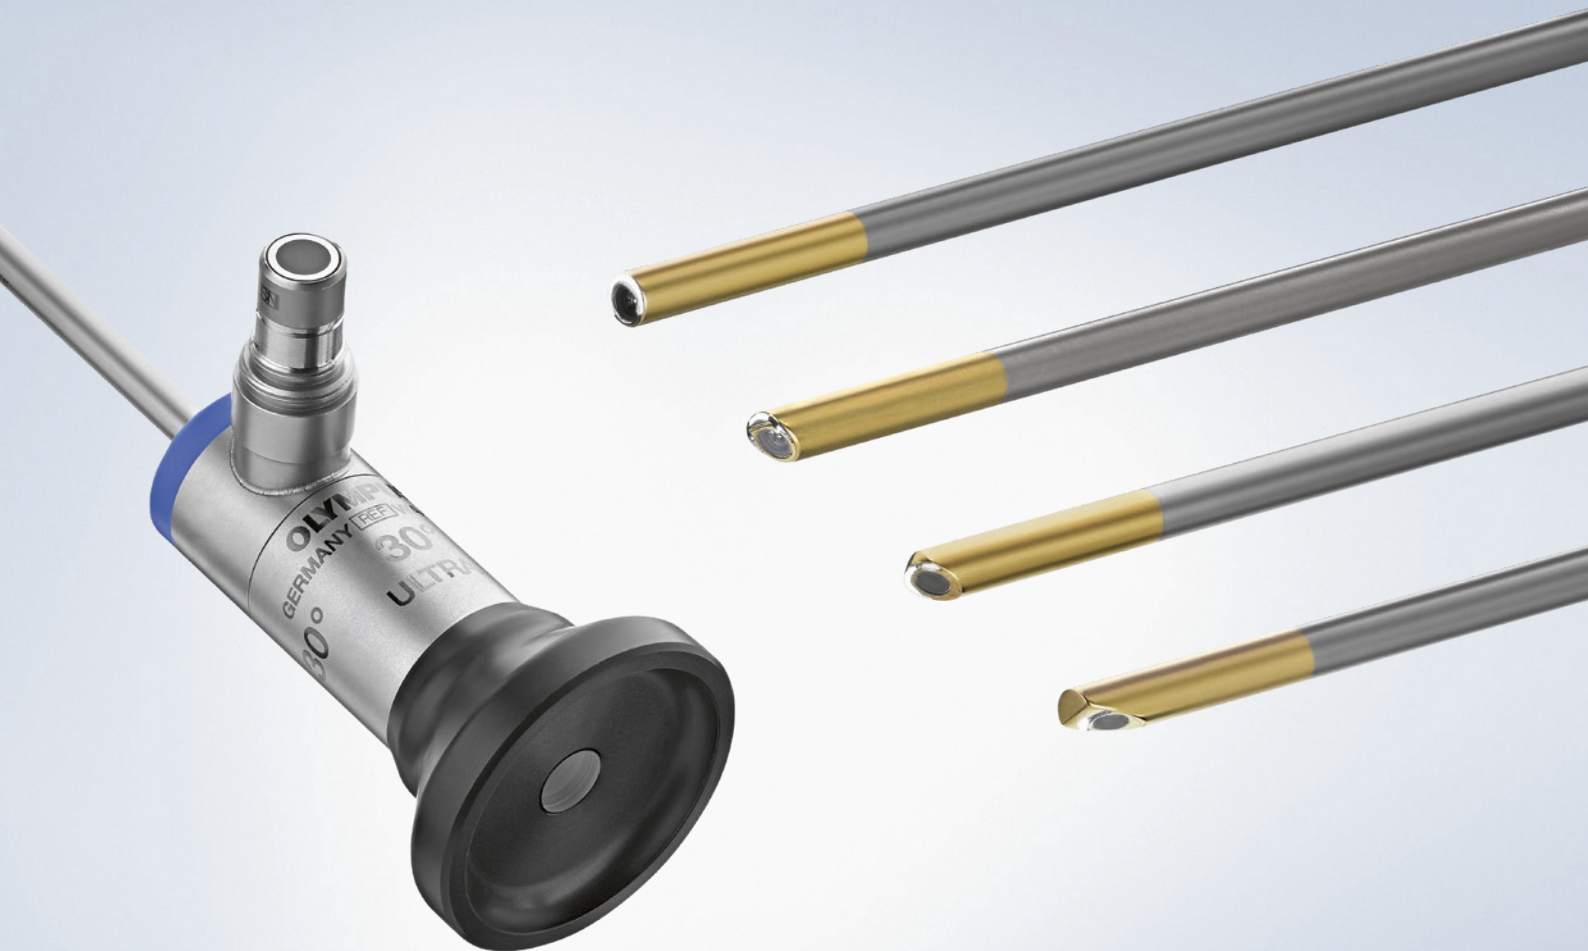

# 4 mm ULTRA Sinusscopes

## ED Glass Lenses – Razor-Sharp Images

High contrast at high spatial frequencies

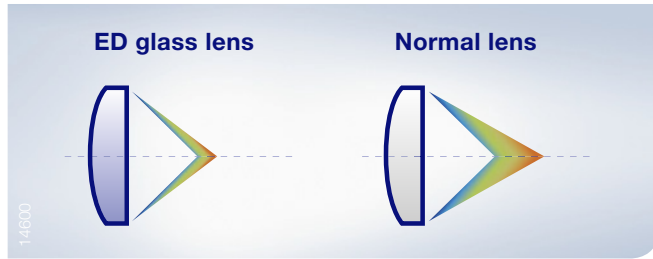

## Compatibility








Mechanical compatibility to current generations of camera heads and light guide cables by Olympus and other manufacturers that correspond to DIN 58105.

## Eco-Friendly/ Fully Autoclavable

Reduced waste due to full reusability of the sinusscopes.



## Ordering Information

Order Number	Outer Diameter	Direction of View (DOV)	
WA4KS400	4 mm	0°	 15379
WA4KS430	4 mm	30°	 15378
WA4KS431	4 mm	30° inverse	 15382
WA4KS445	4 mm	45°	 15366
WA4KS446	4 mm	45° inverse	 15367
WA4KS470	4 mm	70°	 15821
WA4KS471	4 mm	70° inverse	 15372

All products come with an approximate working length of 177 mm and have a maximal insertions portion width of 4.05 mm.

## Specifications

<b>Operating Conditions</b>	Ambient temperature	10 to 35°C (50 to 95°F)
	Relative humidity	30 to 85%
	Atmospheric pressure	700 to 1060 hPa
<b>Storage Conditions</b>	Temperature	10 to 40°C (50 to 104°F)
	Relative humidity	30 to 85%
<b>Transport Conditions</b>	Temperature	-40 to 70°C (-40 to 158°F)
	Relative humidity	10 to 95%

Specifications, design, and accessories are subject to change without any notice or obligation on the part of the manufacturer.



**OLYMPUS EUROPA SE & CO. KG**  
 Postbox 10 49 08, 20034 Hamburg, Germany  
 Wendenstrasse 14-18, 20097 Hamburg, Germany  
 Phone: +49 40 23773-0, Fax: +49 40 233765  
 www.olympus-europa.com

